


## COALESCENT FILTER G<sup>1</sup>/<sub>4</sub> ~ G<sup>1</sup>/<sub>2</sub>

### Compressed Air

Construction	Body—Techno-polymer Bowl—Polyamide with Guard
Drain	Automatic & Semi-Automatic
Standard Filter	0.1 x 10 <sup>-3</sup> mm
Ambient Temperature	+5 ~ +50 °C
Working Pressure	0 ~ 12.5 bar
Mounting	Vertical



Connection	Part Number		Bowl Capacity cm <sup>3</sup>		Flow at 6 Bar NI/min	Weight kg
	Semi Auto Drain	Auto Drain	Semi Auto	Auto		
G <sup>1</sup> / <sub>4</sub>	<b>TA000200</b>	<b>FLA00016</b>	22	7	175	0.100
G <sup>3</sup> / <sub>8</sub>	<b>TA000202</b>	<b>FLA00019</b>	42	27	270	0.225
G <sup>1</sup> / <sub>2</sub>	<b>TA000203</b>	<b>TA000205</b>	100	85	13500	0.225

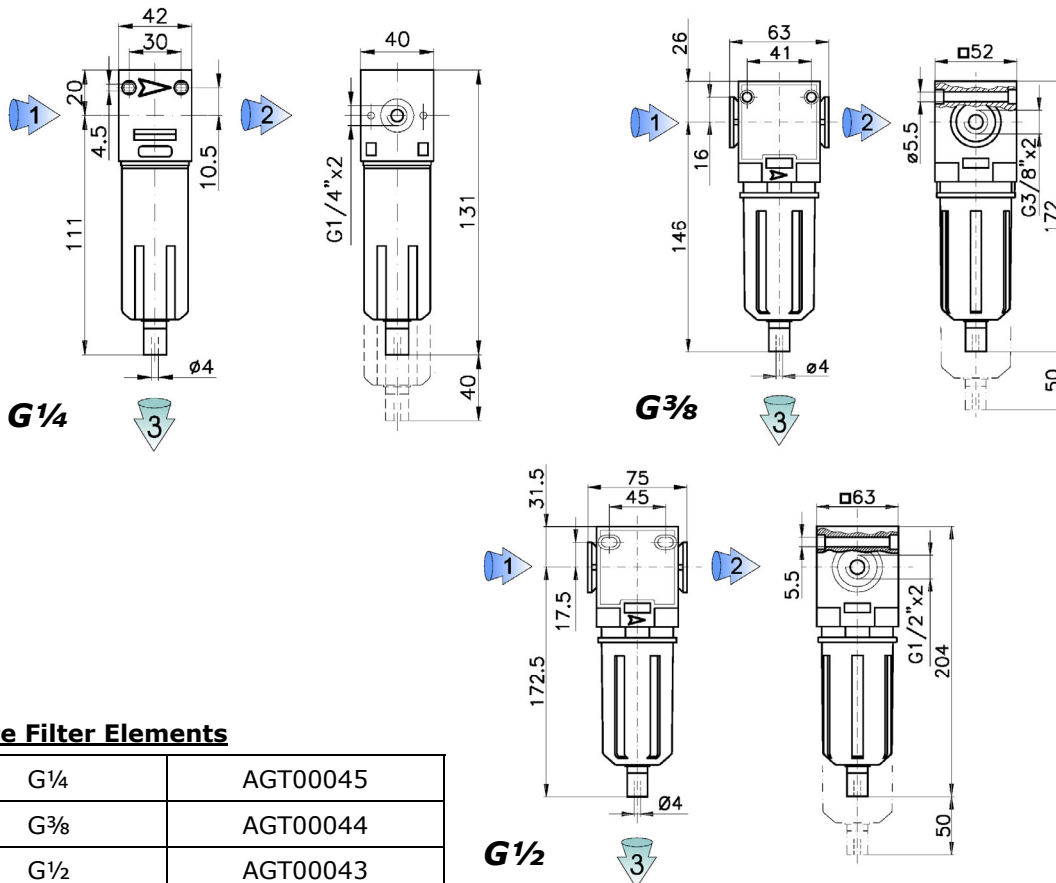

### Spare Filter Elements

G <sup>1</sup> / <sub>4</sub>	AGT00045
G <sup>3</sup> / <sub>8</sub>	AGT00044
G <sup>1</sup> / <sub>2</sub>	AGT00043